

551455

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number  
**WO 2004/087520 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 63/10**

(21) International Application Number:  
PCT/SE2004/000457

(22) International Filing Date: 25 March 2004 (25.03.2004)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:  
0300979-2 3 April 2003 (03.04.2003) SE

(71) Applicant (for all designated States except US): **GEPE DEVELOPMENT AG** [CH/CH]; Baarer Strasse 43, CH-6304 Zug (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ASSARSSON, Inge** [SE/SE]; Basungatan 7, S-533 34 Götene (SE).

(74) Agent: **AWAPATENT I LINKÖPING AB**; Platensgatan 9 C, S-582 20 Linköping (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **DEVICE IN A BUNDLE TIE**

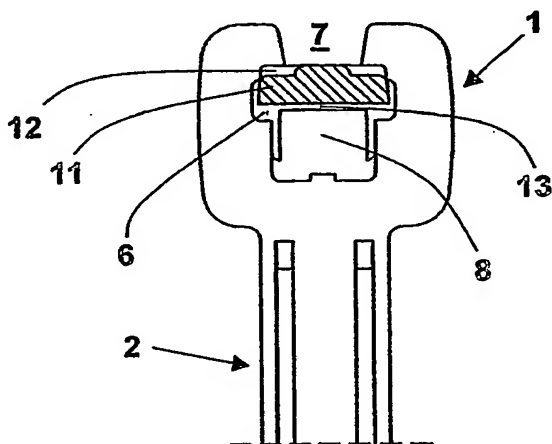

(57) Abstract: The invention relates to a device in a cable tie. This comprises an elongate band part (2) of a certain width and thickness, which at one end has an elongate insertion narrower than the band part and terminates in a grip tab, and at its other end has a locking head (1). The locking head (1) has, on the one hand, a through-opening (6) which is intended for the band part (2) and has substantially the same width as the band part (2) but a height greater than the thickness of the band part (2) and, on the other hand, a slot-shaped recess (7) in one transverse wall of the opening (6), the width of which recess is such that it will allow the insertion part to be inserted into the opening (6) via the recess (7), forming a band loop. On the band part (2) there is tothing (10) and in the locking head (1) a locking tongue (8) provided with tothing (9), which are designed, by means of a positive interlock, to lock the band part (2) in relation to the locking head (1). In the area around the connection of the insertion part (3) to the grip tab there are wing-like projections (11) extending transversely and out from the insertion part (3), which are thinner than the grip tab (4) and which towards the latter terminate in a ridge (12). In forming the band loop, the

ridge (12) is designed, with the projections (11) inserted into the through-opening (6) of the locking head (1) and engaging with the opposing walls of the opening (6), to abut the locking head (1). The fact that the projections (11) are of thinner than the grip tab (4) creates a clearance interval (13) between the insertion part and the locking tongue (8).

WO 2004/087520 A1